BALL VALVE LINE 18607.1

TECHNICAL GASES STRAIGHT WALL MOUNTED TAP

APPLICATION:
- Wall mounting
- Vertical mounting

DETAILS:
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:
- Epoxy powder coating RAL 7035


MATERIALS:
- Brass
- Handle in PP

HEADWORK SEALING:
- PTFE ball valve

CONNECTION TAP:
- Male thread G3/8” or G1/2”

STANDARD AND NORMS:
- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1



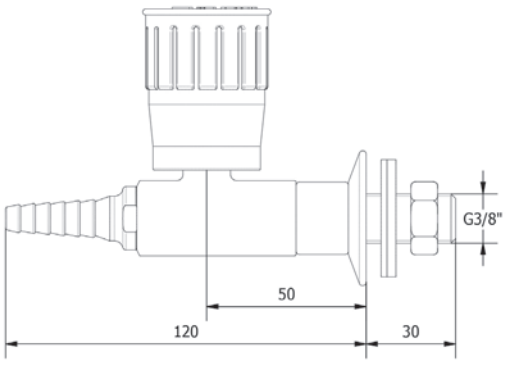

WEIGHT:
- 573 gr

WARRANTY 2 YEARS