WATER 11080.1

BENCH COLUMN WITH GOOSENECK SWIVELLING SPOUT

APPLICATION:
- Bench mounting

DETAILS:
- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

SURFACE PROTECTION:
- Epoxy powder coating RAL 7035

MATERIALS:
- Brass
- Handle in PP


HEADWORK SEALING:
- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

CONNECTION TAP:
- Male thread G3/8” - G1/2”

STANDARD AND NORMS:
- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

OPTIONS:
- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside



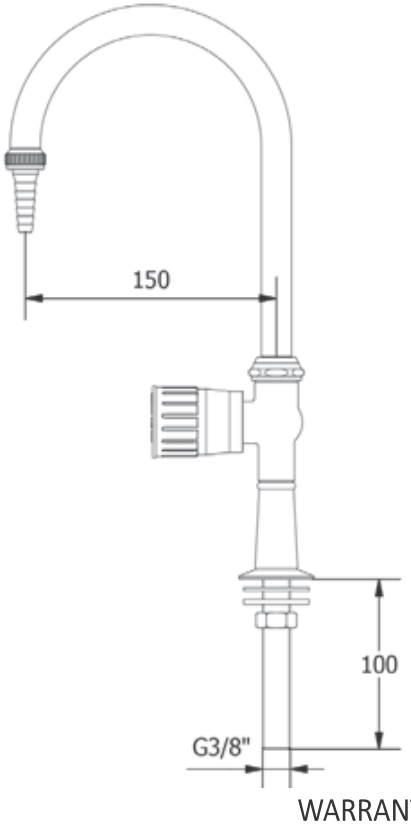

WEIGHT:
- 927 gr

WARRANTY 2 YEARS